


# Passive Components

## Power Splitters

### 800~2200MHz

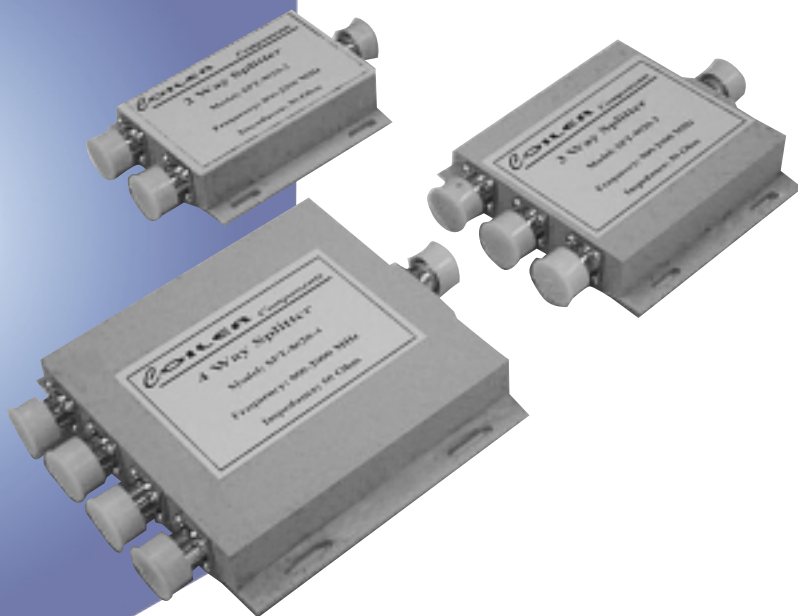

#### *Electrical Specifications:*

Model no.	SPT-8022-2	SPT-8022-3	SPT-8022-4
Frequency Range	---	800~2200MHz	---
Number of Way	2	3	4
Insertion Loss (dB) TYP.	0.4	0.6	0.8
Isolation (dB) Min.	20	20	20
Return Loss (dB) Max.	-17	-17	-17
Amplitude Unbalance (Max.)	0.3dB		
Impedance	50Ω		
Input Power (Max.)	5Watts		
Temperature Range	-30°C ~ +60°C		
I/O Port Connectors	N female		
Mechanical	Wall mount case		

 **TAIWAN COILER INTERNATIONAL CORP.**

8F-4, No. 75, Sec. 1, Hsin Tai Wu Road, Hsi-Chih, Taipei Hsien, Taiwan

Tel: 886-2-2698-2618 • Fax: 886-2-2698-2627 • <http://www.coiler.com.tw>

